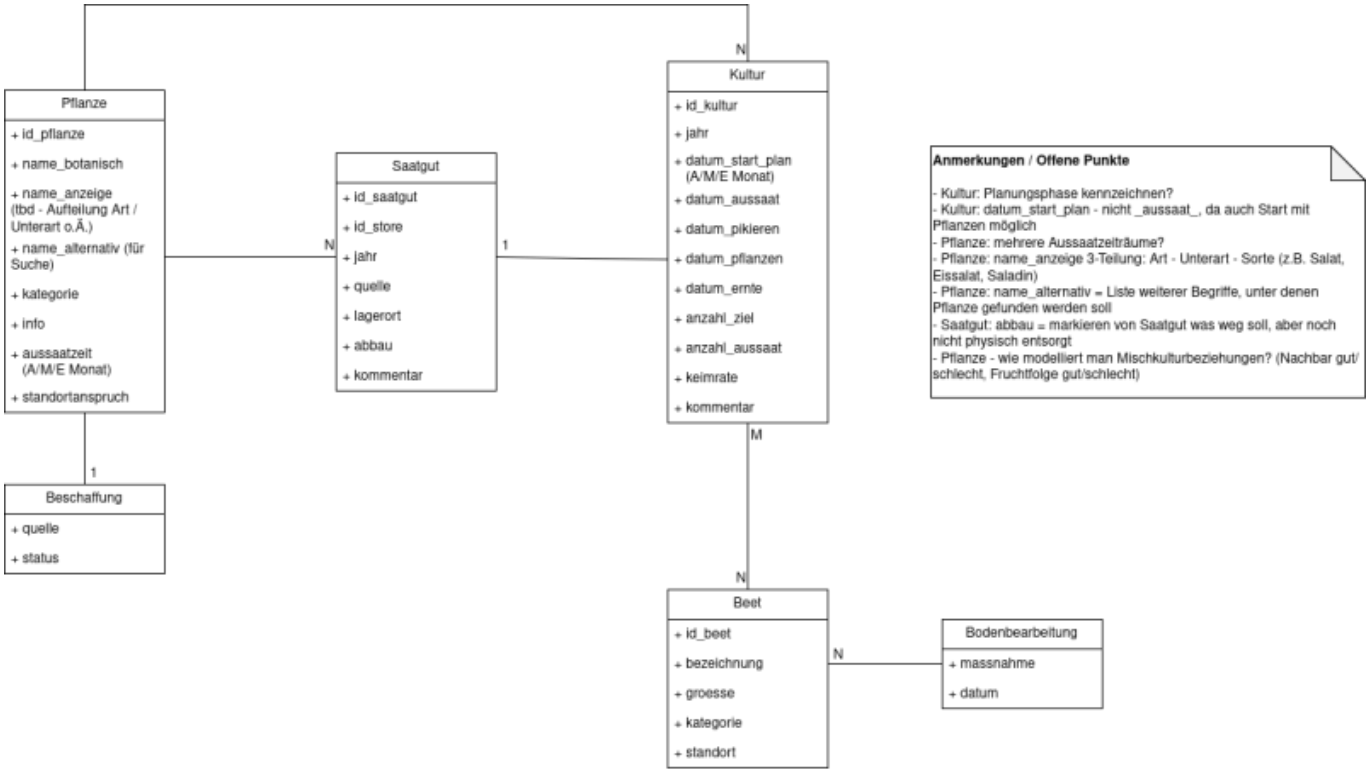


erDiagram Plant ||--o{ Seeds : has Plant ||--|| Order : purchase Plant { int id_pflanze list[str] category str collective_species str plant str cultivar list[bool] sowing_period str comment_plant str remarks_sowing str remarks_cultivation } Seeds ||--o{ Cultivation : grows Seeds { int id_seeds int id_container str source } Cultivation ||--|| Plant : grows Cultivation ||--|| Bed : florishes Cultivation { int id_kultur } Order { int id_order } Bed ||--|| SoilImprovement : enhances Bed { int id_bed } SoilImprovement { int id_soil }

ToDo:

- Was ist der angezeigte Name für die Pflanze? 1- bis 3-stufiger Name?
- ist es sinnvoll, für die Kategorien noch Sammelbegriffe zu haben je nach Verwendungszweck (Gemüse, Kräuter, Gärtnerische Funktion (Dünge-/Schutz-/Bienenweide-/...-pflanzen), Zierpflanze)
- Modellierung Aussaatzeitraum

Idee: Pro Monat A(nfang)/M(itte)/E(nde) –> Liste von 36 Bool-Werten, 1 = aussäen / 0 = nicht aussäen

- Wie wird Beschaffung/Entsorgung gekennzeichnet?

From:
https://wiki.serious-seeds.zwohundertvier.de/ - **Serious Seeds**

Permanent link:
https://wiki.serious-seeds.zwohundertvier.de/doku.php?id=datenmodell&rev=1745875135

Last update: **2025/04/28 21:18**